



This is a pump used for domestic hot water circulating. The Stainless steel housing makes it suitable for underfloor heating. It is maintenance free and is low in noise. Comes complete with 1-1/2" F x 1" F unions.

The pump is characterised by -


- Circulation body materials suitable for potable water
- 3 speed operation
- Flows to 100 l/min
- Heads to 8m

Liquid temperature: 2°C - 110°C  
 Materials: Pump body: Stainless Steel 304 SS  
 Impeller: Corrosion resistant composite PPO Back Plate and Rotor Can: Stainless Steel 304 SS  
 Unions: 1-1/2" F x 1" F Unions Stainless Steel 304 SS

Installation: Maximum ambient temperature: 40°C  
 Maximum Operating Pressure: 10 bar  
 Port spacing: 180mm  
 Port size: 1-1/2" BSPM  
 (1" BSPF if used with supplied unions)

Electrical Data: 230V  
 Mains Frequency: 50Hz  
 Power consumption speeds: 1,2,3  
 135W 190W 245W  
 Motor: Continuous  
 Motor type: Canned rotor  
 Ingress Protection: IP44  
 Power cable: 1m

**Bianco Pumpz 2 Year Warranty**

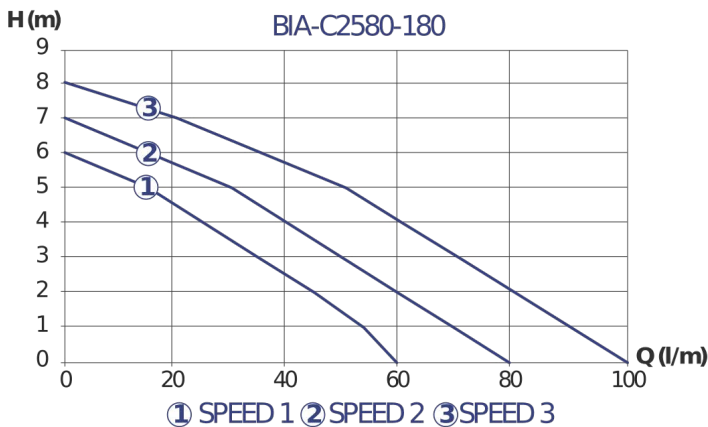

*Also available*  
 BIA-C2060-150  
 BIA-C1509-160  
 BIA-ICIRC150  
 BIA-C3280-180