



**SWITCH ON.
GO WIRELESS.**

BROMIC SMART-HEAT™ CONTROLS



BROMIC[®]
HEATING

enquiries@bromic.com
bromic.com/[gowireless](https://www.bromic.com/gowireless)

CONTROL OPTION SIMPLE, SMART AND WIRELESS

Wireless Controls

Less wires means fast, easy installation saving you time and money.

Range of Control

30m (100 ft) range with no line of sight needed for control. Simply click and go.

Compact Design

Smart design allows for Wireless Remote to be hand held or wall mounted so it is easily hidden from sight, so as not to intrude on your space.

Simplified Wiring Installation

Greater controllability with one-touch pairing. No routing or control unit required.

Control your Heat Output

Vary your heat output for complete flexibility.



ON | OFF 4-CHANNEL REMOTE*

The Bromic Smart-Heat Wireless On | Off Controller can switch power supply to two separate outputs, enabling independent 'On | Off' control without even having to move from your seat thanks to its wireless capabilities.



DIMMER CONTROLLER*

The Bromic Smart-Heat Wireless Dimmer Controller allows you to adjust the heat from 1-100% for perfect comfort and complete flexibility, making sure you can enjoy the outdoors even when it gets a little colder.


FOCUS ON WHAT YOU ENJOY DOING.

With wireless remote options available for your outdoor heating solutions, switch on comfort effortlessly.

From a single point you can control multiple heaters, turning them off & on as well as dimming the heat outputs for electric models.


The Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment, making outdoor heating easy.


CONTROLS SIMPLE, SMART AND WIRELESS

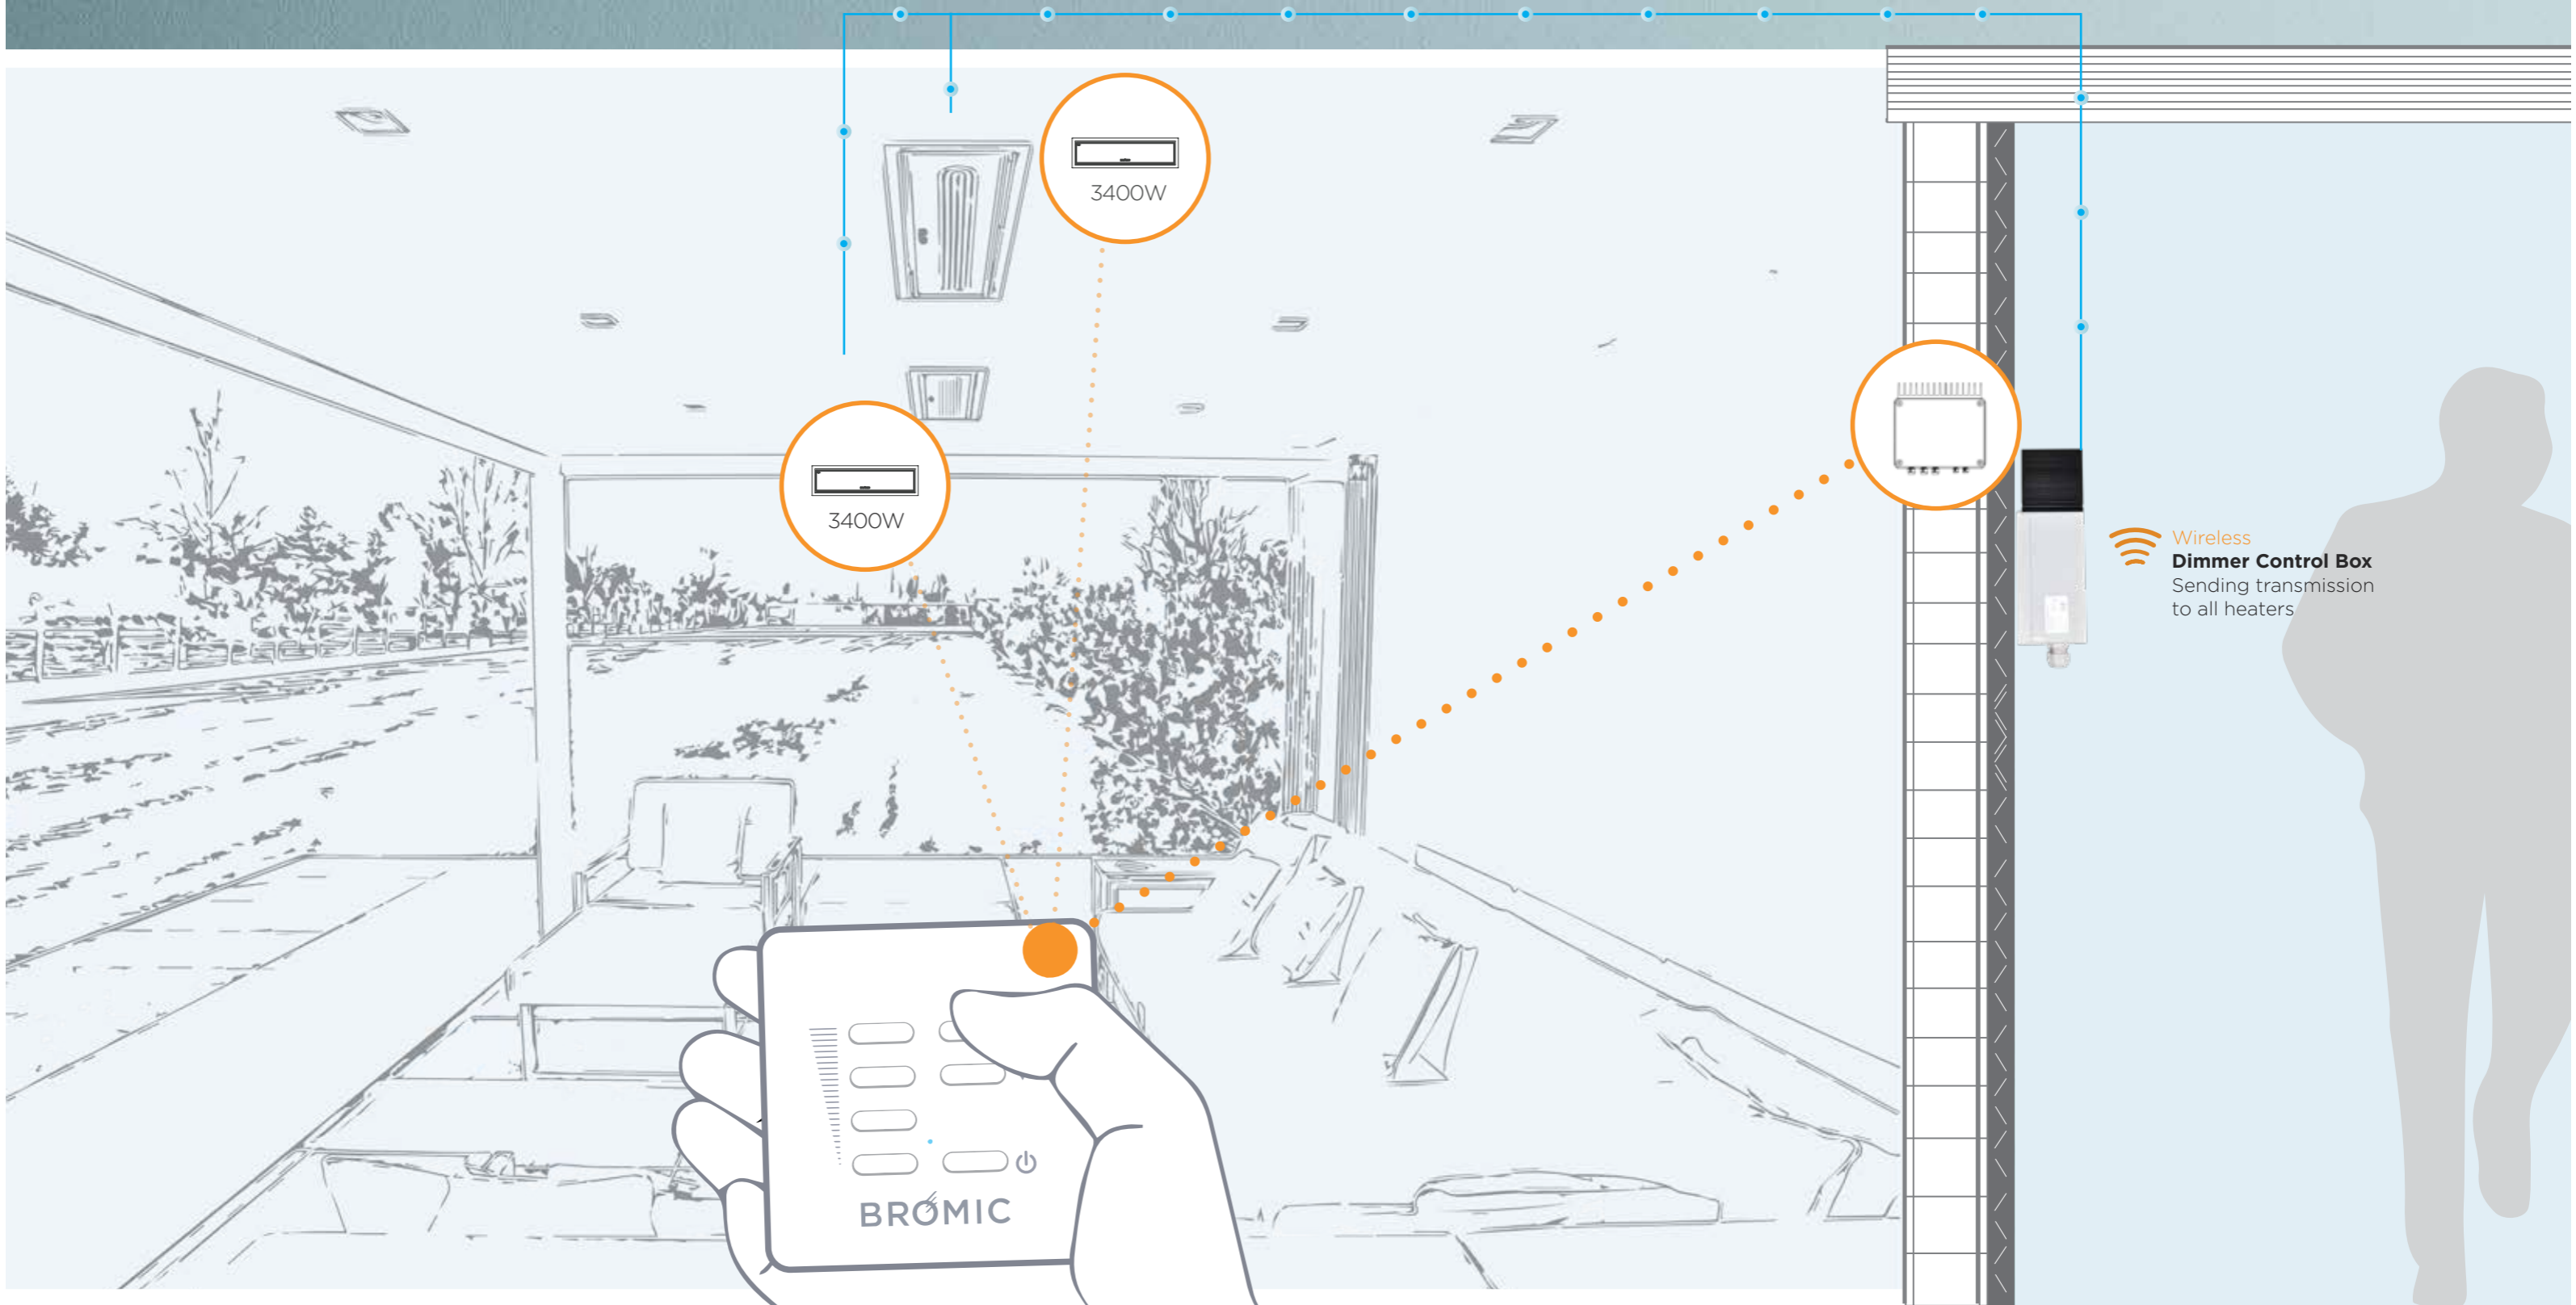

Outdoor area

Indoor room

 **Smart-Heat
Wireless Dimmer Controller**
Allows the power output of a heater to be adjusted for perfect comfort, with the ability to adjust multiple units in unison with a single remote



 **Wireless
Dimmer Control Box**
Sending transmission to all heaters

WIRING DIAGRAMS SET UP SOLUTIONS


Electric Heater Solution

INSTALLATION OPTIONS

- Option 1: 1 x 6000W
- Option 2: 1 x 4000W
- Option 3: 2 x 3400W
- Option 4: 2 x 3000W
- Option 5: 2 x 2000W

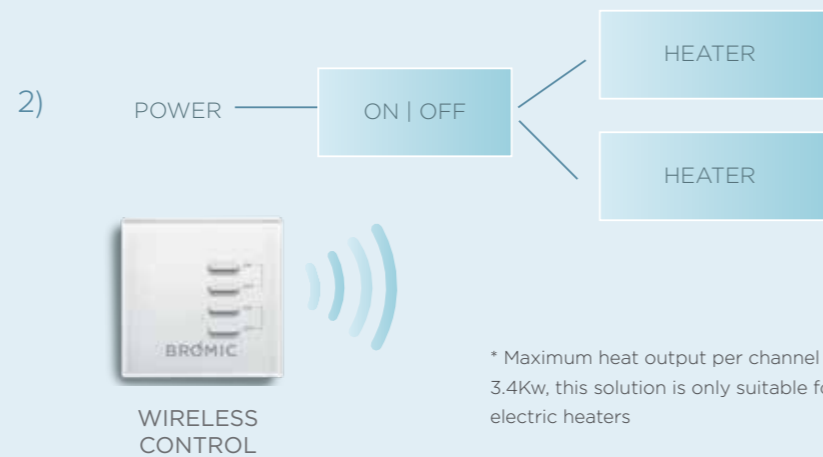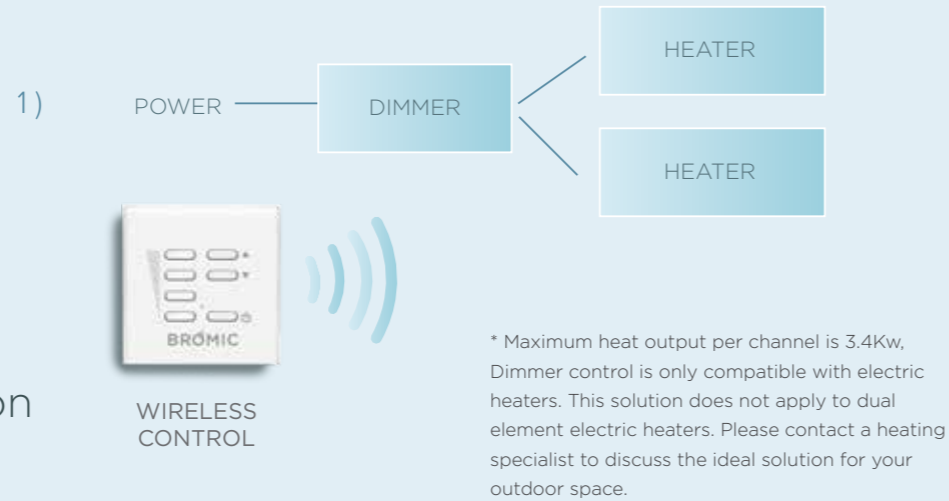

Gas Heater Solution

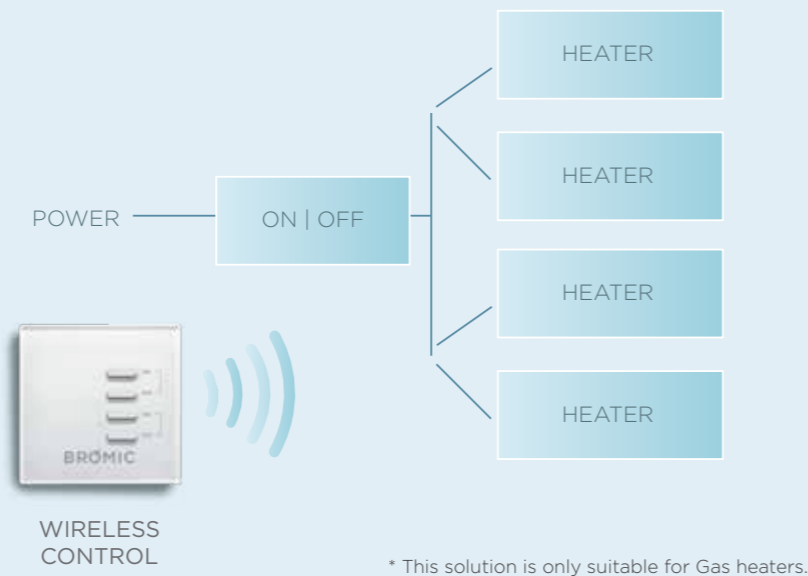

ON | OFF SMART-HEAT™ CONTROLLER

MODEL NUMBER	2620275-1
POWER SUPPLY	110/230VAC, 31A max, Single Phase
MAX OUTPUT POWER CHANNEL	3400W @ 230VAC 1500W @ 110VAC
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-20/+50°C
MAXIMUM REMOTE MEMORIZED	42
DIMENSIONS	205 x 145 x 85mm
PROTECTION CLASS	IP54



DIMMER SMART-HEAT™ CONTROLLER

MODEL NUMBER	2620276-1
POWER SUPPLY	110/277VAC 50/60Hz (29A.max)
MAX OUTPUT POWER CHANNEL	6800W @ 277VAC (25A) 6800W @ 240VAC (28.5A.) 3080W @ 110VAC (28A.)
FUSE PROTECTION	32A (FWC high speed)
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-20/+30°C
MAXIMUM REMOTE MEMORIZED	42
DIMENSIONS	195 x 200 x 75mm
PROTECTION CLASS	IP54



^Arrange all the necessary safety devices and use only materials complying with the standard of electrical installations.

BROMIC.COM/GOWIRELESS

ASIA PACIFIC

10 Phiney Place, Ingleburn
Sydney NSW 2565

enquiries@bromic.com

1300 276 642

NORTH AMERICA

18 Technology Drive, STE 121,
Irvine California 92618 USA

enquiries@bromic.com

1800 301 1293

EUROPE

Weinauallee 19
02763 Zittau Germany

enquiries@bromic.com

+49 (0) 358 3518 9885