
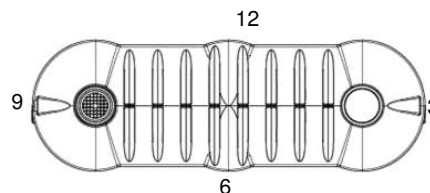


Code: **NT5000XXSLIMSLR** (Zone 1 & Zone 2)

5000 Litre SLR Slimline – 11 00 gallons

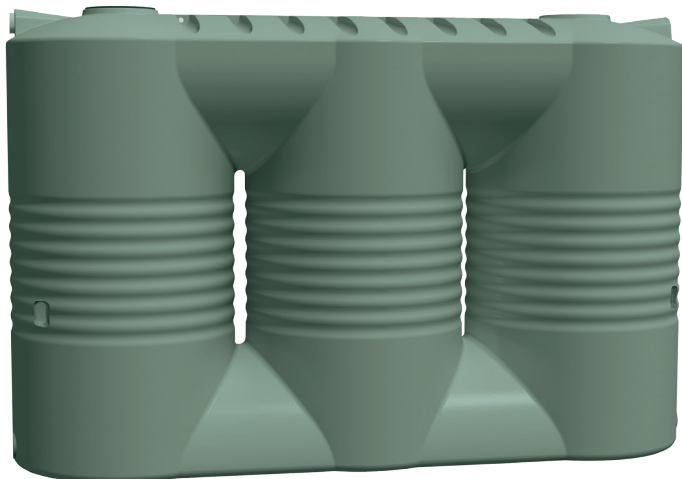

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

Dimensions:	
Length:	3180mm
Width:	1080mm
Inlet Height:	2060mm
Total Height:	2060mm
Weight (approx.)	200kg

Tank is supplied standard with:	
1 x 300mm inlet strainer	
1 x 90mm overflow cap	
1 x 90mm overflow	
1 x 25mm flush spinweld	
1 x 25mm hex nipple	
1 x 25mm brass gate valve	
1 x 25mm flush spinweld	
1 x 25mm plug	

Standard fit out details:	
Inlet:	Inlet: @ 9 o'clock (left side) – 300mm inlet strainer
Overflow:	@ 3 o'clock – 90mm overflow cap (moulded into tank)
Outlet:	@ 3 o'clock – 25mm flush spinweld 400mm up from base with 25mm plug (tap not included)
Outlet:	@ 3 o'clock - 25mm flush spinweld, hex nipple, 25mm brass gate valve

Other fit out options:	
Inlet:	@ 3 o'clock (right hand side) but in addition with the inlet @ 9 o'clock (extra charge)
Overflow:	@ 9 o'clock (moulded into tank)
Outlet:	@ 9 o'clock - 25mm flush spinweld 400mm up from base with 25mm plug (tap not included)
Outlet:	@ 3 o'clock - 25mm flush spinweld, hex nipple, 25mm brass gate valve

- Customer to request fit out on either left or right side of tank if not standard fit out
- Made in any standard COLORBOND® roofing colours

*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured and certified to Australian Polyethylene tank standard AS/NZS4766:2006.

All Nylex tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

