

Pump Systems

- HCM Series
- HV Series





HCM Series

 HOUSEHOLD WATER SUPPLY & IRRIGATION

 RAINWATER TANK PUMPSET

WATER TRANSFER

 PRESSURE BOOSTING

Horizontal Multistage Pump Systems

FEATURES


- Automatic pressure controller with inbuilt run dry protection
- Stainless steel impellers, chambers and shaft
- NBR carbon / ceramic mechanical seal
- IP55 motor
- Insulation class F
- Heavy duty brass coupling
- Quiet operation



HCM2-60

HCM2-40

HCM4-60

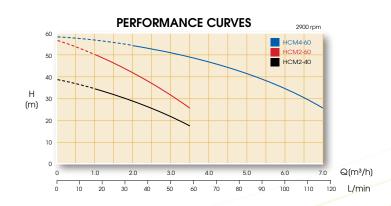

MODEL	P2 (KW)	Amps (A)	Max.FLOW (L/min)	Max.HEAD (m)	Inlet/Outlet	Water Temp
HCM2-40	0.55	4.2	58	38	1" X 1"	0 - 70°c
HCM2-60	0.75	5.2	58	56	1" X 1"	0 - 70°c
HCM4-60	1.1	6.8	116	58	1¼" X 1"	0 - 70°c

^{*} Other models available upon request

VORTEX Sump Pumps



HV Series

- STORMWATER
- RAINWATER
- SULLAGE
- SEPTIC TANKS
- SEWAGE TREATMENT SYSTEMS
- WATER SUPPLY AND IRRIGATION

• 1 YEAR WARRANTY



- Cast iron pump body and impeller
- Stainless steel shaft
- Double seal mechanical seal NBR ceramic / graphite with oil barrier chamber and lip seal to protect seal in event of dry running.

CE CAZINA



CE CAUSE

HV180



MODEL	P2 (KW)	Amps (A)	Max.FLOW (L/min)	Max.HEAD (m)	Outlet	Max.Solid Size (mm)	G.W (kg)
HV180	0.18	1.5	133	7	1", 1¼", 1½"	15	8.5
HV750	0.75	5.5	300	10	2″	25	19.5

USEFUL INFORMATION

PRESSURE CONVERSION

- H (m) x 10 = KPA
- KPA x 0.145 = PSI
- PSI x 6.895 = KPA
- KPA x 0.001 = BAR

AVERAGE WATER CONSUMPTION

- Standard Shower Head 15 L/min
- Water Saving Shower Head 6-7 L/min
- Standard Household Tap 10-15 L/min
- Lawn Sprinkler 10-15 L/min



Wholesale Trade Enquiries Email: sales@maxijet.com.au Phone: 1800 MAXIJET



Available from

DISCLAIMER

Whilst every effort has been made to ensure the accuracy of the information contained herein, Hyjet accepts no liability for any loss of damage direct or consequential arising out of, or in relation to, the use or application of the said information or products referred to herein. All information is believed to be correct at the time of printing. E.&O.E.